




PRODUCT DATA SHEET | EIGER 93103



IP66 IK06 CRI >80

	A	B	C	Power
93106.01	500	240	100	10 W
93106.02	750	240	100	15 W
93106.03	1000	240	100	15 W
93106.04	1500	240	100	20 W
93106.05	2000	240	100	20 W
93106.06	2500	240	100	20 W

Dimensions

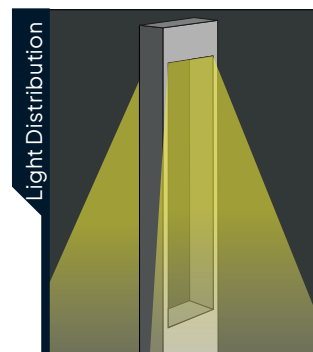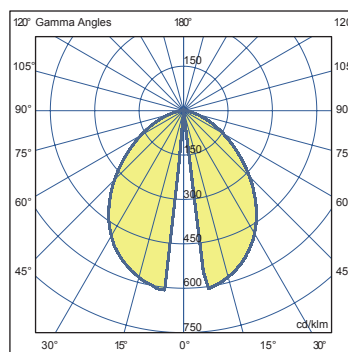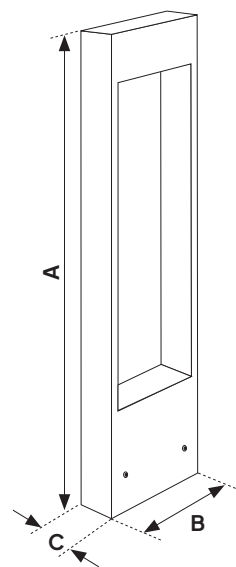

DESCRIPTION

Extruded aluminum body
Tempered glass
Steel flange with galvanized
Chromate conversion
Electrostatic powder coating
Stainless steel screws (grade 304)
Mechanical impact resistance IK06
Protection Grade IP66
Electrical installation Class I

TECHNICAL DETAILS (Felix module)

Module luminous efficiency : 121 lm/W
Luminaire luminous efficiency : 58,2 lm/W (4000k)
Cct : 2700K - 3000K - 4000K - 6500K
Color Rendering Index : >80
Power Factor : $\cos \phi > 0,9$
Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
Operating Temperature Range : -20 °C / +45 °C
Input Voltage : 220-240(V) 50-60(Hz)
Driver : On/Off

COLOR OPTIONS

RAL 7016 Anthracite Grey
 RAL 9005 Black
 RAL 9006 White Aluminium
 RAL 7022 Umbra Grey
 RAL 9016 White
 RAL xxxx Optional

OPTIONS

DALI controllable
 Double powder coating

PRODUCT DATA SHEET | EIGER 93103

