PRODUCT DATA SHEET | BALDO 93104

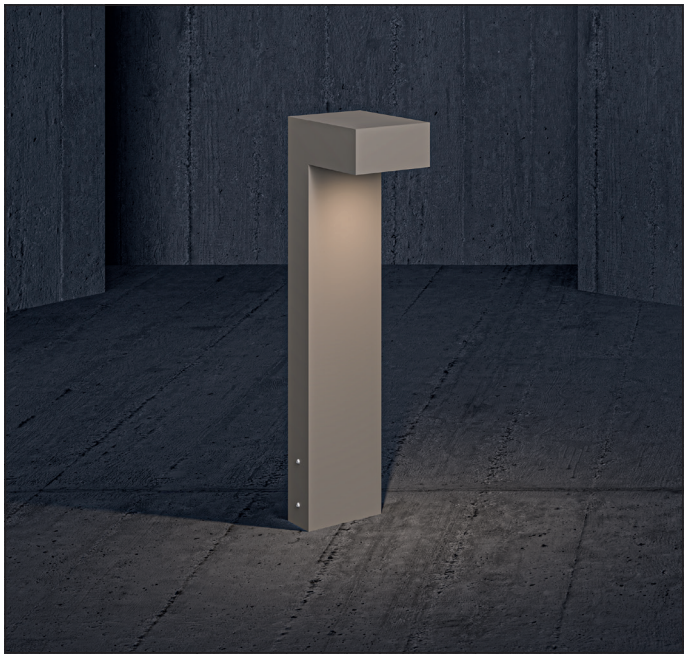

IP66 IK06 CRI >80

	A	B	C	Power
93104.01	500	250	150	10 W
93104.02	750	250	150	15 W
93104.03	1000	250	150	15 W
93104.04	1500	250	150	20 W
93104.05	2000	250	150	20 W
93104.06	2500	250	150	20 W

Dimensions

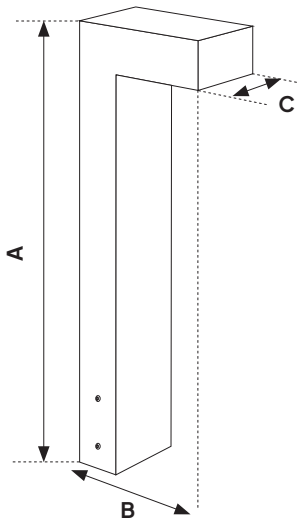

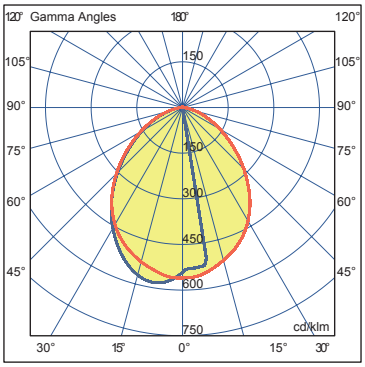

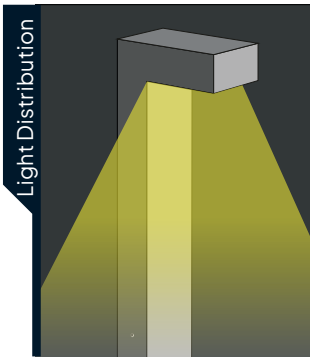

DESCRIPTION

Extruded aluminum body
Tempered glass
Steel flange with galvanized
Chromate conversion
Electrostatic powder coating
Stainless steel screws (grade 304)
Mechanical impact resistance IK06
Protection Grade IP66
Electrical installation Class I

TECHNICAL DETAILS (FELIX MODULE)

Module luminous efficiency : 121 lm/W
Luminaire luminous efficiency : 81,8 lm/W (4000k)
Cct : 2700K - 3000K - 4000K - 6500K
Color Rendering Index : >80
Power Factor : Cos Ø > 0,9
Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
Operating Temperature Range : -20 °C / +45 °C
Input Voltage : 220–240(V) 50–60(Hz)
Driver : On/Off

COLOR OPTIONS

RAL 7016 Anthracite Grey
RAL 9005 Black
RAL 9006 White Aluminium
RAL 7022 Umbra Grey
RAL 9016 White
RAL xxxx Optional

OPTIONS

DALI controllable
Double powder coating

HORNBECK
0808 129 3773
enquiries@hornbeckgroup.com
www.horbeckgroup.com

PRODUCT DATA SHEET | BALDO 93104

HORNBECK

0808 129 3773
enquiries@hornbeckgroup.com
www.horbeckgroup.com