PRODUCT DATA SHEET | STOCKHORN 93105

Dimensions

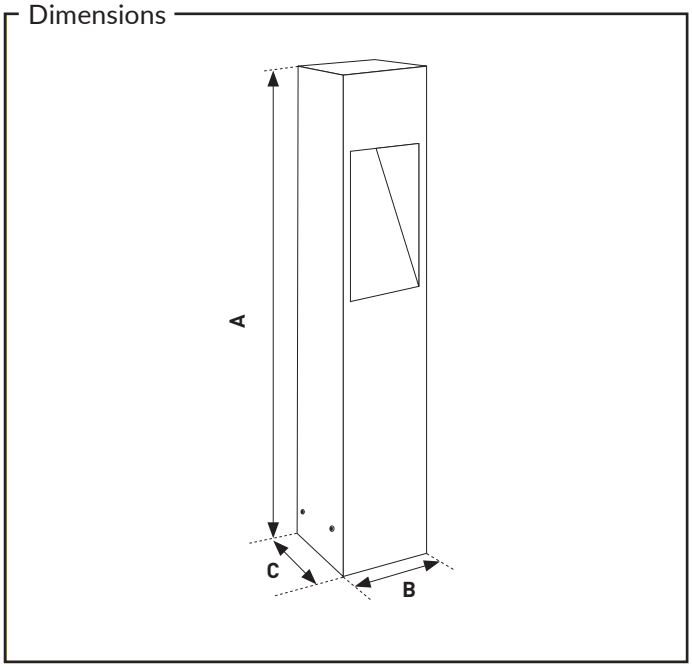

IP66 IK06 CRI >80

	A	B	C	Power
93105.01	500	150	100	15 W
93105.02	750	150	100	15 W
93105.03	1000	150	100	15 W
93105.04	1500	150	100	20W
93105.05	2000	150	100	20W
93105.06	2500	150	100	20W

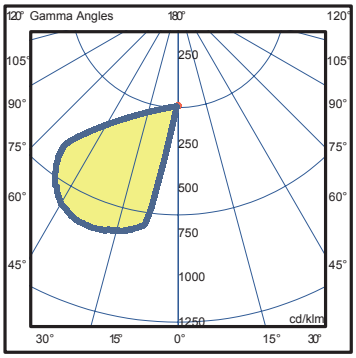

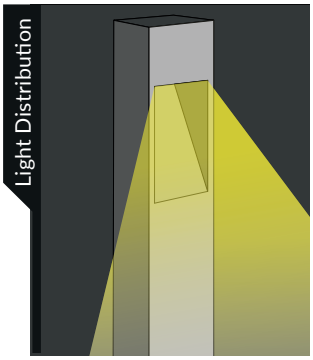

DESCRIPTION

Extruded aluminum body
Tempered glass
Steel flange with galvanized
Chromate conversion
Electrostatic powder coating
Stainless steel screws (grade 304)
Mechanical impact resistance IK06
Protection Grade IP66
Electrical installation Class I

TECHNICAL DETAILS (FELIX MODULE)

Module luminous efficiency : 121 lm/W
Luminaire luminous efficiency : 53,8 lm/W (4000k)
Cct : 2700K - 3000K - 4000K - 6500K
Color Rendering Index : >80
Power Factor : Cos Ø > 0,9
Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
Operating Temperature Range : -20 °C / +45 °C
Input Voltage : 220–240(V) 50–60(Hz)
Driver : On/Off

COLOR OPTIONS

RAL 7016 Anthracite Grey
RAL 9005 Black
RAL 9006 White Aluminium
RAL 7022 Umbra Grey
RAL 9016 White
RAL xxxx Optional

OPTIONS

DALI controllable
Double powder coating

HORNBECK

0808 129 3773
enquiries@hornbeckgroup.com
www.hornbeckgroup.com

PRODUCT DATA SHEET | STOCKHORN 93105

HORNBECK

0808 129 3773
enquiries@hornbeckgroup.com
www.hornbeckgroup.com